



Solid Cap (Aluminum Solid Electrolytic Capacitor With Conductive Polymer)

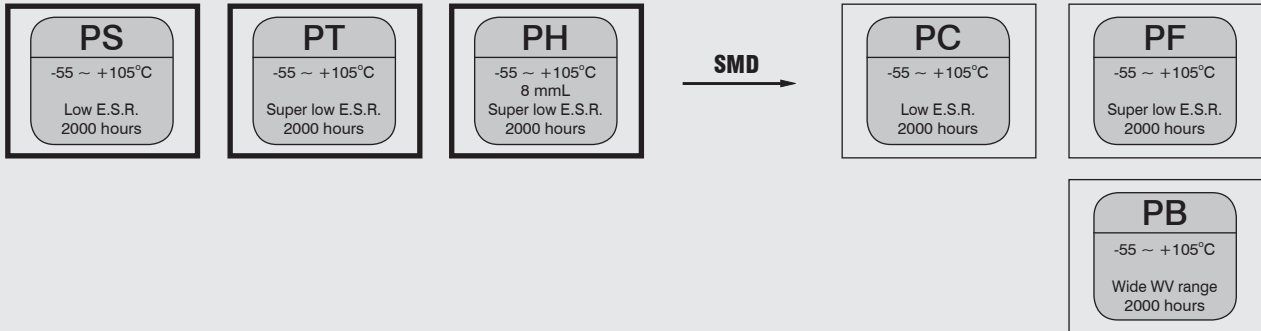


Chip Type (Surface Mounted Device)

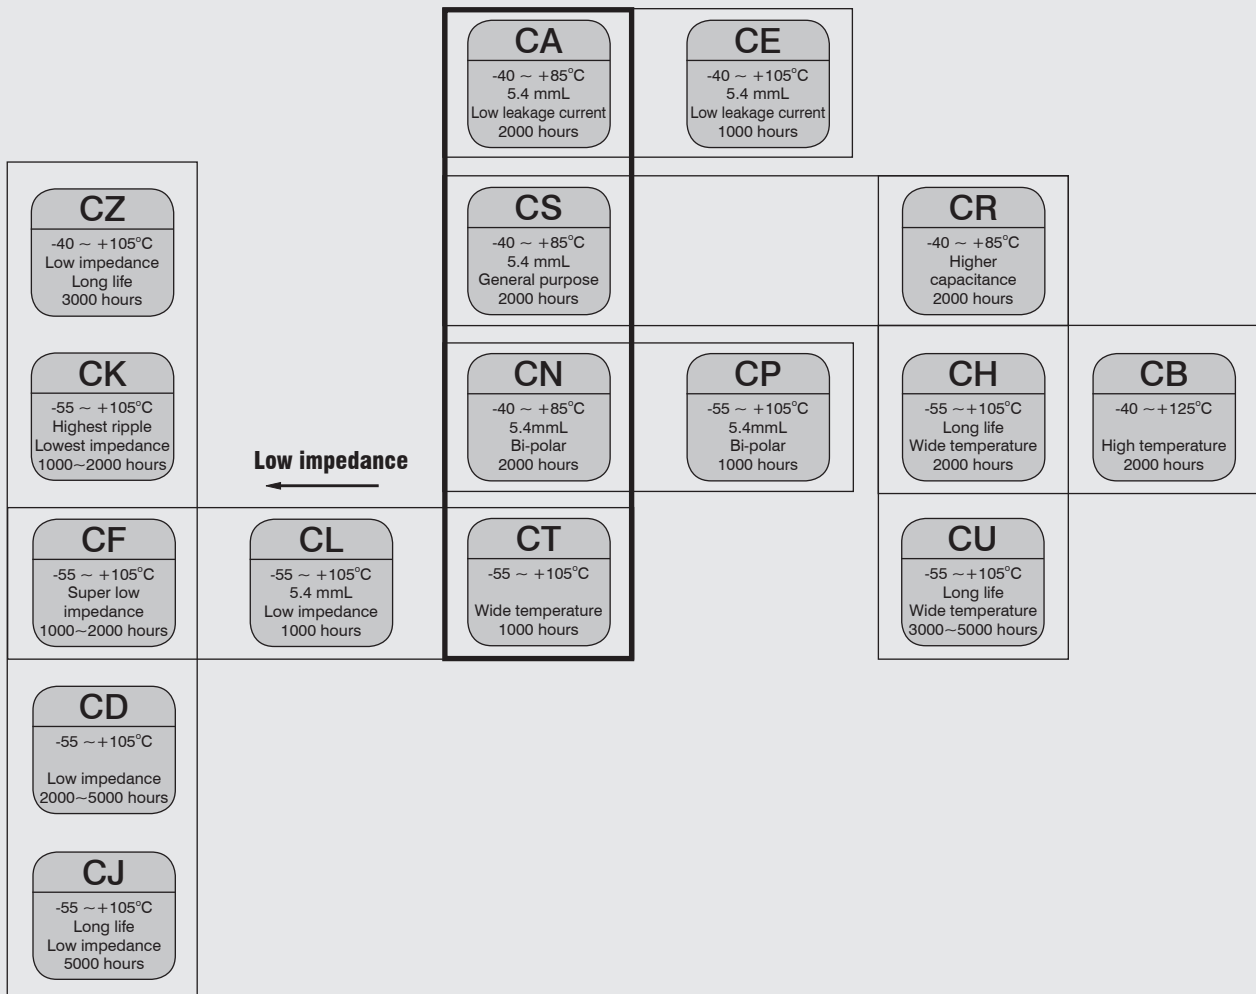

SERIES CHART OF CAPACITORS

JAMICON®

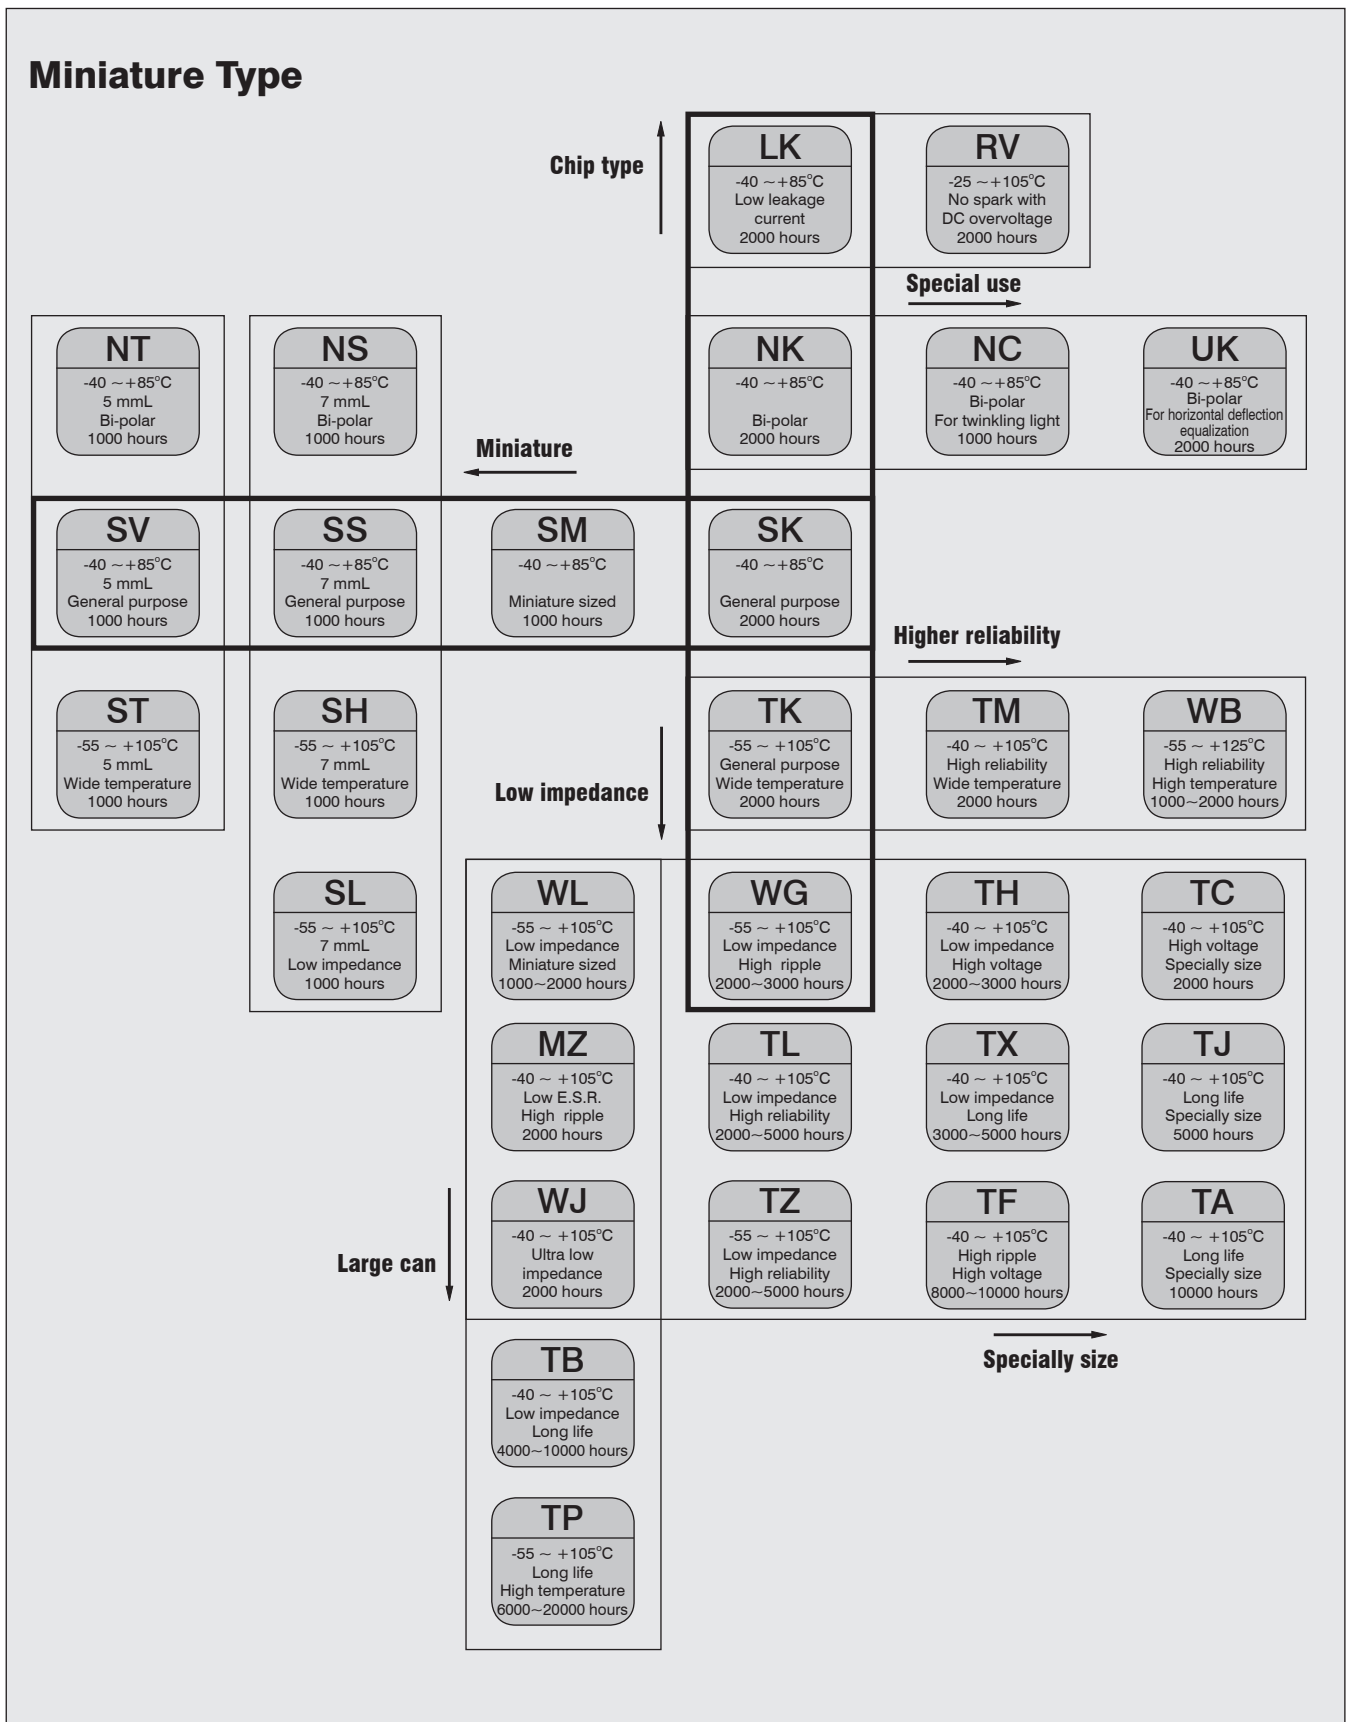

Large Can Type

	<p>LS</p> <p>-40 ~ +85°C Snap-in terminal Low profile 2000 hours</p>	<p>LP</p> <p>-40 ~ +85°C Snap-in terminal General purpose 2000 hours</p>	<p>LT</p> <p>-40 ~ +85°C Snap-in terminal High ripple long life 3000 hours</p>	<p>LL</p> <p>-40 ~ +85°C Snap-in terminal High voltage 5000 hours</p>
<p>HV</p> <p>-25 ~ +105°C Snap-in terminal No sparks with DC overvoltage 3000 hours</p>	<p>HS</p> <p>-40 ~ +105°C Snap-in terminal Low profile Wide temperature 2000 hours</p>	<p>HP</p> <p>-40 ~ +105°C Snap-in terminal Wide temperature 2000 hours</p>	<p>→ Long life</p>	
<p>HL</p> <p>-40 ~ +105°C Snap-in terminal Wide temperature 5000 hours</p>	<p>HM</p> <p>-25 ~ +105°C Snap-in terminal Small than HS series 2000 hours</p>	<p>Snap-in terminal</p>		
<p>HF</p> <p>-40 ~ +105°C Snap-in terminal High voltage 7000 hours</p>				
<p>HX</p> <p>-40 ~ +105°C Snap-in terminal High voltage 10000 hours</p>				

Screw Terminal Type

	<p>GP</p> <p>-40 ~ +85°C Screw terminal High reliability 5000 hours</p>	<p>UP</p> <p>-40 ~ +85°C Screw terminal High reliability 10000 hours</p>	<p>Aluminium can with threaded stud mounting</p> <p>↑</p>	
<p>→ Long life</p>	<p>KP</p> <p>-40 ~ +85°C Screw terminal General purpose 2000 hours</p>	<p>MP</p> <p>-40 ~ +85°C Screw terminal High reliability 5000 hours</p>		<p>FP</p> <p>-40 ~ +85°C Screw terminal High reliability 10000 hours</p>
	<p>RP</p> <p>-40 ~ +105°C Screw terminal Wide temperature 2000 hours</p>	<p>XP</p> <p>-40 ~ +105°C Screw terminal Wide temperature 5000 hours</p>	<p>EP</p> <p>-40 ~ +105°C Screw terminal High reliability 10000 hours</p>	<p>↓</p> <p>Aluminium can with threaded stud mounting</p>
<p>Screw terminal</p>	<p>BP</p> <p>-40 ~ +105°C Screw terminal High reliability 5000 hours</p>			